




8 7 6 5 4 3 2 1

D

C

B

A

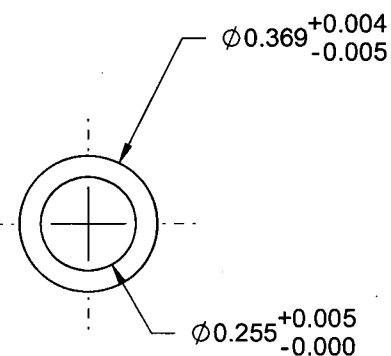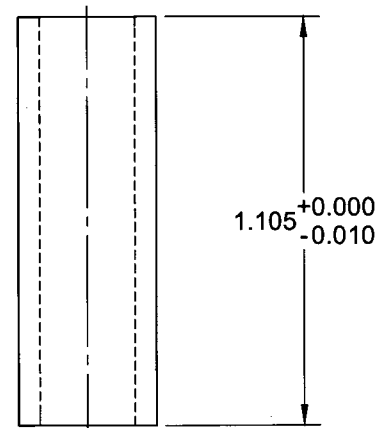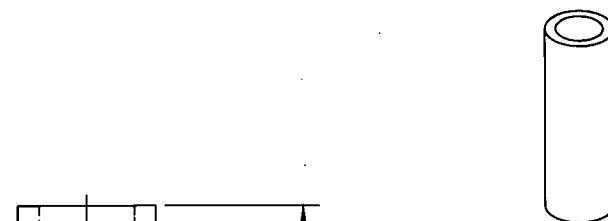

D3816-1 SPACER

NOTES:



- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ROUND BAR PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116) OR PER AMS-QQ-A-200/8 (OR AMS 4160) (REF DART SPEC M6061T6R)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N D3816-1/-3 USING FINE POINT PERMANENT INK MARKER
- 7) WEIGHT: D3816-1 0.01 lbs
D3816-3 0.01 lbs

D

C


B

A

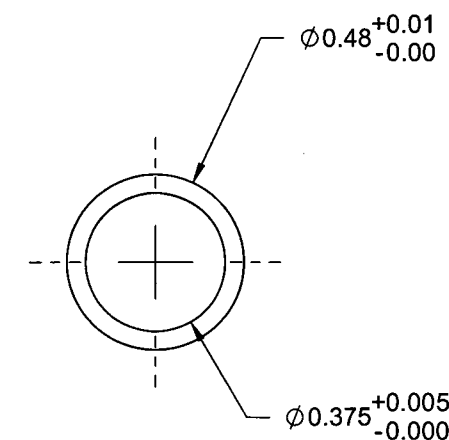

D3816-3 SPACER

RELEASE
09/01/13

A	NEW ISSUE	BY	08.09.17
REV.	DESCRIPTION		DATE
DESIGN		DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN			
CHECKED		DRAWING NO.	REV. A
MFG. APPR.		D3816	SHEET 1 OF 1
APPROVED		TITLE	SCALE
DE APPR.		SPACER	NTS
DATE		08.09.17	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.